

# ASSA ABLOY

# **FIRE DOOR LEAVES**

# Fire door and panel over (with transom)

#### **DESCRIPTION**

Timber fire door leaves and panel over including separating transom utilising the latest Pyropanel fire resistant door core and design technology. These doorsets are fully tested and certified to AS1530.4 and AS1905.1, and are available in a variety of sizes and finishes in 30 minute, 1 hour, 2 hour and 4 hour fire resistance levels.

#### **APPLICATIONS**

Ideal for applications that require a certified fire door and a panel over with a separating transom. Typically found in office lobbies, hospitals, schools, public buildings, shopping centres, factories, warehouses, plant rooms, etc.

#### **FEATURES**


- Panel available over single and pair fire door leaf configurations (note: panel over pair doors is a single panel only)
- Door and panel are 48mm thick.
- Pressed metal door frames only.
- Ply faces.
- Panel is screw fixed, with optional collet and cap fixings.

## **OPTIONAL EXTRAS**

- Veneer, steel, aluminium, PVC, laminate.
- Vision panels up to 300 x 200 or 600 x 100mm for fire door using clear fire rated glass.
- Kick panels of stainless steel to selected height.
- Smoke seals, viewing lens, electric strikes and locks, panic bars, magnetic hold open devices, etc, are all optional hardware items - Refer to Pyropanel hardware tech sheet for the latest edition of the approved hardware, or contact Pyropanel for any items that are not listed.

# **MODELS AVAILABLE**

Model	Description	Max FRL	Thickness	Max overall size (leaf and panel)
FDPO-WT-120-30	Panel over with transom	-/120/30	48	3600 x 1200 /1200
FDPO-WT-240-30	Panel over with transom	-/240/30	48	3350 x 1200 /1200

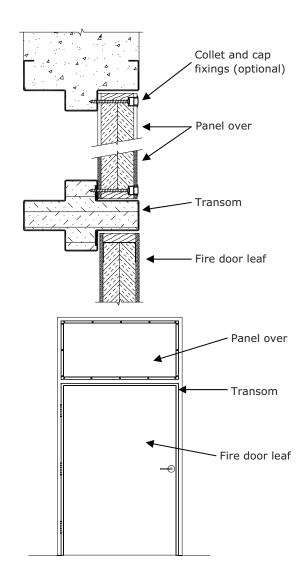

### **HOW TO SPECIFY**

"Door to be a (eg) Pyropanel PFD060-48\* Fire Rated Door, 48mm thick, -/60/30 FRL, Ply face\*, mounted in Pyropanel PMDF / Pyropanel Fire rated steel door frame with a Pyropanel FDPO-WT-120-30 (FIRE DOOR PANEL OVER WITH TRANSOM), and the following options: (eg, vision panels, kick panels, etc\*),

\* denotes example - delete, change or specify as required

## **Pyropanel Developments Pty Ltd**

Unit 1, 97 Lewis Rd, Wantirna South, Vic 3152 Ph: **(03) 9837 8500** Fax: **(**03) 9837 8550

Email: sales@pyropanel.com.au Web: www.pyropanel.com.au

# Distributed by:

Pyropanel Developments has a policy of continuous improvement and reserves the right to change methods and specifications without notice. Note: The Tech Sheet is an uncontrolled document, If printed please refer to the Tech-Sheet on the website to check if this document is valid.